



## 4 Point Bend Test Fixture

G22 bend fixtures allow a variety of flexural and fracture toughness tests such as flexural modulus, strength and yield strength. Lower anvils adjust to different span specimens. The specimen is supported on two precision machined anvils of a desired radius. Force is applied centrally (3 point) or at distances either side of center (4 point).

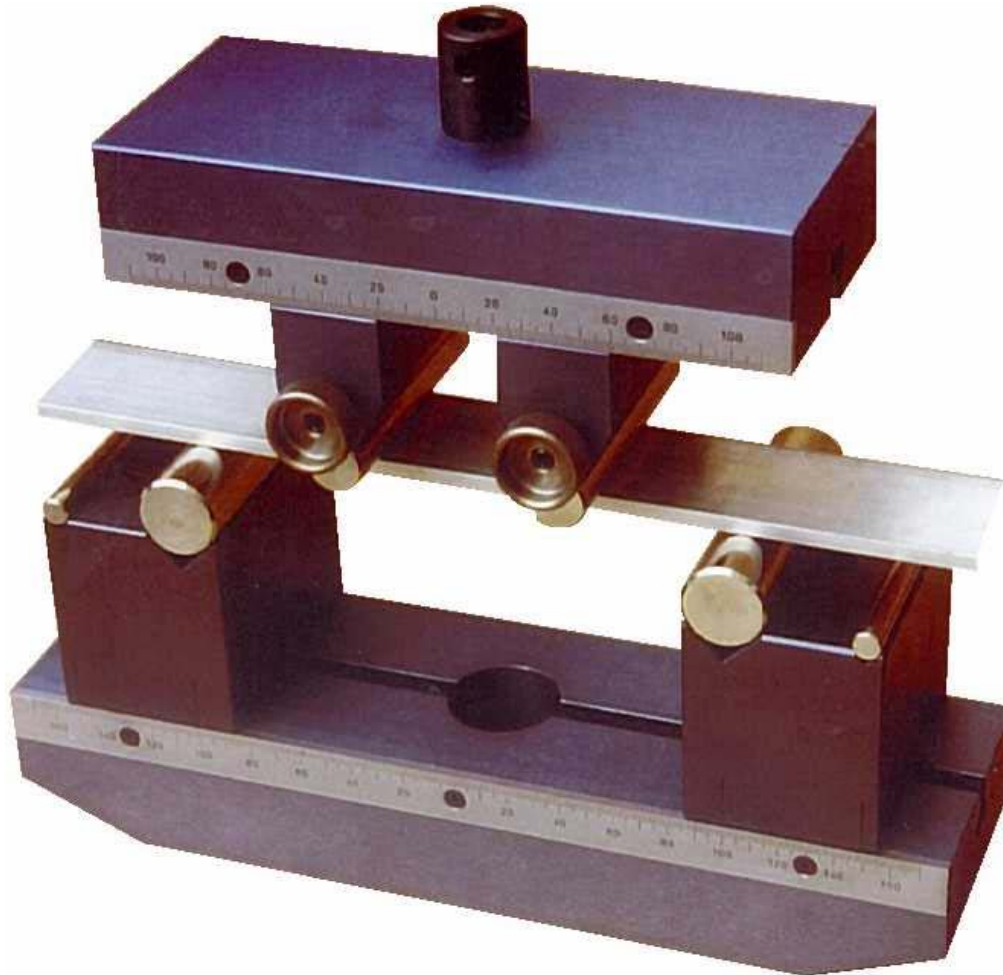

### G22-360 Features

- Hardened Steel (HRC 60) Cylindrical Contact Rollers
- Set of three (10, 20, and 30 mm) diameter rollers included as standard. Other sizes available.
- Metric rulers aid in test setup
- 42 mm inside diameter on base as standard – other sizes available.
- Adapters available for your test machine.
- 100 mm wide rollers standard. Other sizes available.

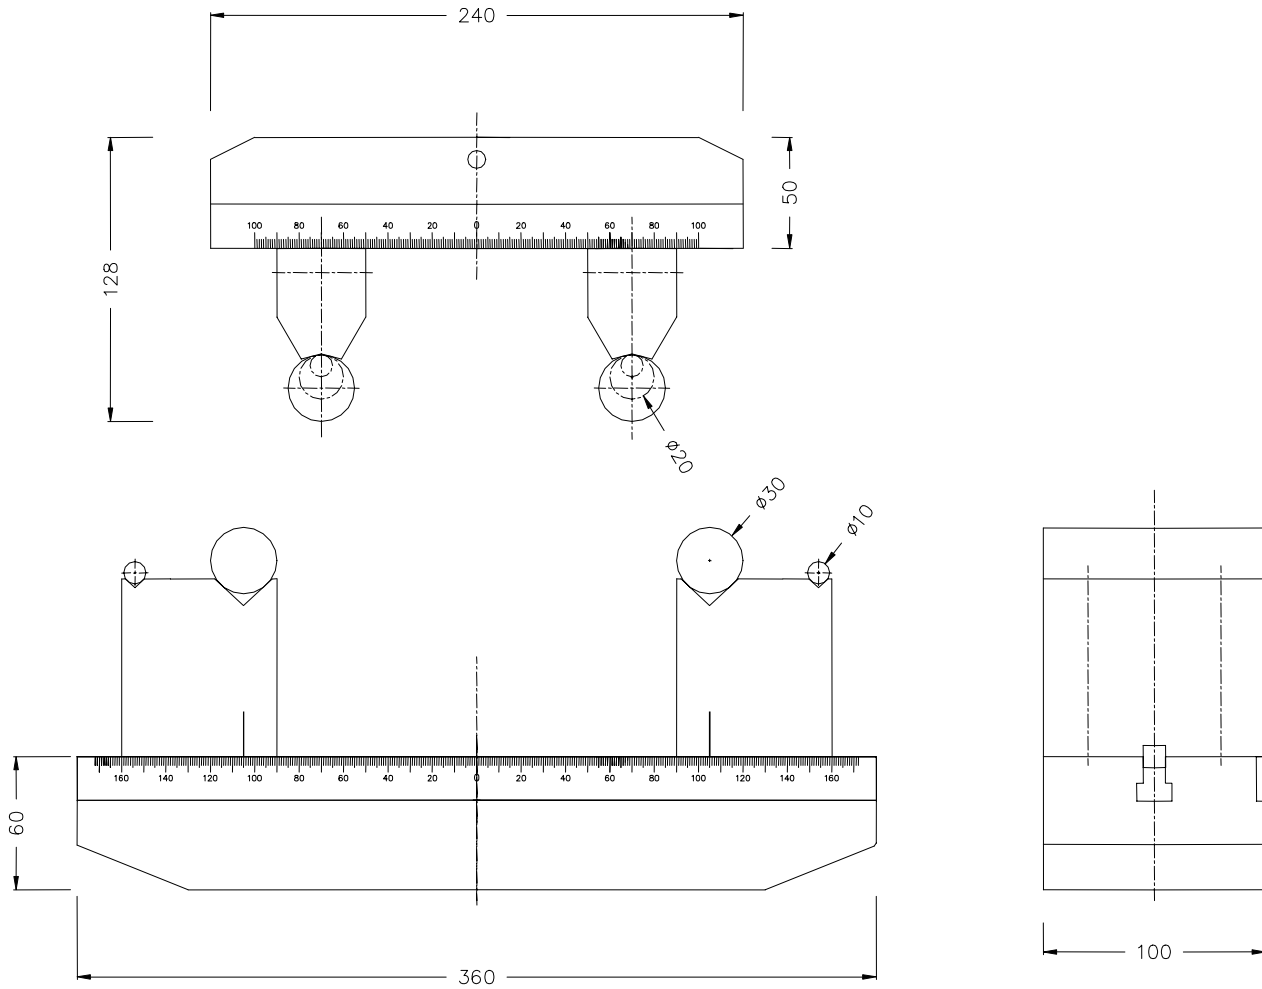

**G22-11-360-4Pt Dimensions**