

312 Family Universal Test Machine

Load Capacity: 25 kN (5500 lbf)

Overview

The 312 Family tabletop dual column electromechanical test machine is one of the most popular universal test machines on the market. Ideal for mechanical tests including tensile, compressive, bend, bond, flexural, fracture, peel, shear, tear, stress relaxation, and short term creep tests at forces up to 25 kN (5500 lbf). Versatile controller and software means that it can be configured to your performance, flexibility and simplicity requirements. Commonly used for medium and low force testing applications for materials and products tests, destructive and proof load tests, biomedical, and plastics testing. Extended travel and extra wide options are available.



Complete system includes:

- Dual column load frame
- Electromechanical design
- Advanced digital control electronics
- Choice of precision load cell
- Choice of software package
- Host of other user-orientated features

Features

- Compact tabletop system - frame requires less than 0.3 m² (3 ft²) of desk space
- Oil-Free all-electric motor technology for clean operation - Environmentally friendly
- Designed for static testing on a variety of materials and components
- 25 kN (5500 lbf) load capacity for static testing applications
- Electrically powered, no special mechanical or electrical facility requirements needed
- Precision-aligned dual column load frame

Controller and Software - Powerful, Scalable & Affordable

- Latest desktop PC or touchscreen controller for static testing applications
- Control pendant with critical controls and emergency stop at your fingertips
- User interface optimized for intuitive workflow and ease of use
- Monitor up to 20 transducer channels

Exceptional Versatility

- Versatile system design makes it possible to engineer a variety of system configurations to different application requirements
- Dual column test space to suit a wide variety of specimens, grips, fixtures, environmental chambers, biomedical baths and other accessories
- Dual column configuration provides easy access to the test area providing easy specimen set-up and is ideal for a wide range of tests
- Compatible with a large library of Universal static test software modules



System Specifications

Configuration	312
Force Capacity	±25 kN (±5500 lbf)
Crosshead Travel	980 mm (39 in)
Vertical Test Space*	1100 mm (43 in)
Horizontal Test Space**	426 mm (16.8 in)
Maximum Speed	500 mm/m (20 ipm)
Minimum Speed	0.0033 mm/m (0.00013 ipm)
Maximum Return Speed	500 mm/m (20 ipm)
Maximum Force at Full Speed	±25 kN (±5500 lbf)
Maximum Speed at Full Force	500 mm/m (20 ipm)
Footprint Dimensions (h × w × d)	1448 × 864 × 584 mm (57 × 34 × 23 in)
Weight	215 kg (475 lbs)
Power Requirements***	208-230V 5.9A 50/60Hz Single Phase

* Extended travel and vertical height options available

** Wider column spacing options available

*** 120V Power option available

Controller Specifications

Data Acquisition Rate	Up to 5 kHz simultaneous on force, displacement and strain channels
Load Measurement Accuracy	Meets or exceeds ASTM E4, ISO 7500/1, EN 10002-2, JIS B7721. ± 1.0% of reading down to 1/100th of load cell capacity
Strain Measurement Accuracy	Meets or exceeds ASTM E83, BS 3846, ISO 9513, and EN 10002-4 standards.


Popular Options

- Add Torsion Channel (convert to an Axial Torsion system)
- Software Options
 - Force Testing Package
 - Materials & Product Testing Package
 - Materials & Product Testing Plus Package
 - Premium Package
 - TestVideo add-on software module
 - TestCalc add-on software module
- Desktop or Touchscreen Computer (Windows 10)
- T-Slot Baseplate
- Environmental Chambers
 - Furnaces
 - Ovens
 - Baths
- Grips & Test Fixtures - Thousands of static and fatigue rated fixture choices. Made per recognized test standards such as ASTM, ISO, etc.
- Sensors
 - Clip On Extensometers
 - Lower force load cell
 - Strain Channel
 - Video Extensometer (DIC)
 - LVDT
 - Deflectometers
 - DCDT
 - COD displacement gage



312 family with torsion

Contact an application engineer to configure a solution to your application requirements.

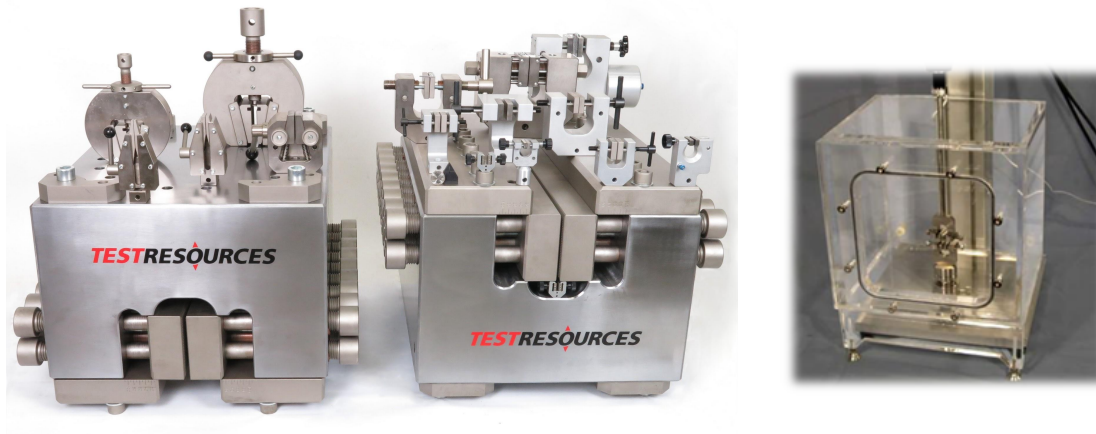

Note: Specifications are subject to change at any time without notice.

[Contact us to request a quote and confirm specifications](#)

TestResources Inc – 701 Canterbury Road S – Shakopee MN USA 55379
800.430.6536 952.944.6534 Fax 952.233.3682
www.testresources.net