


G706-D2229 Adhesion Strength Test Fixture for ASTM D 2229

Adhesion Test Device Requirements – ASTM D2229 specifies test fixtures for determining the adhesion properties of steel wires attached to vulcanized rubber. The G706 fixture meets these requirements.

The G706 Grips are specially designed to avoid slippage while pulling a steel cord from a block of vulcanized rubber. Other wire materials are applicable with the G706 test fixture.

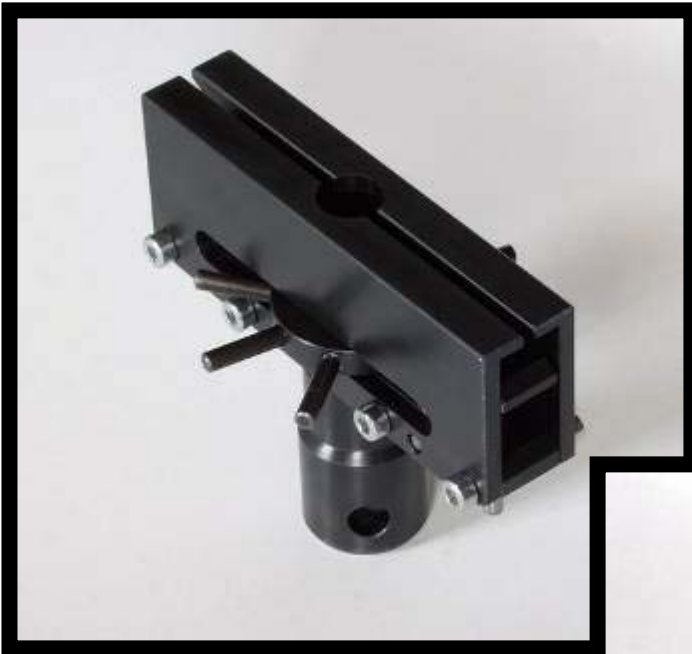

G706 Test Fixtures are made to order per exact ASTM requirements



Contact an application engineer to configure a solution to your application requirements:
1-800-430-6536

Reference: ASTM Standard D2229, 2002, “ASTM D2229 Standard Test Method for Adhesion Between Steel Tire Cords and Rubber,” ASTM International, West Conshohocken, PA, 2007, www.astm.org.